

Home Lift -UH-




Hidraⁱ



Specification

Hydraulic unit with oil submerged motor and screw pump for silent operation.

For speeds higher than 0,3 m/s the power unit is supplied with a two speeds valve block for leveling.

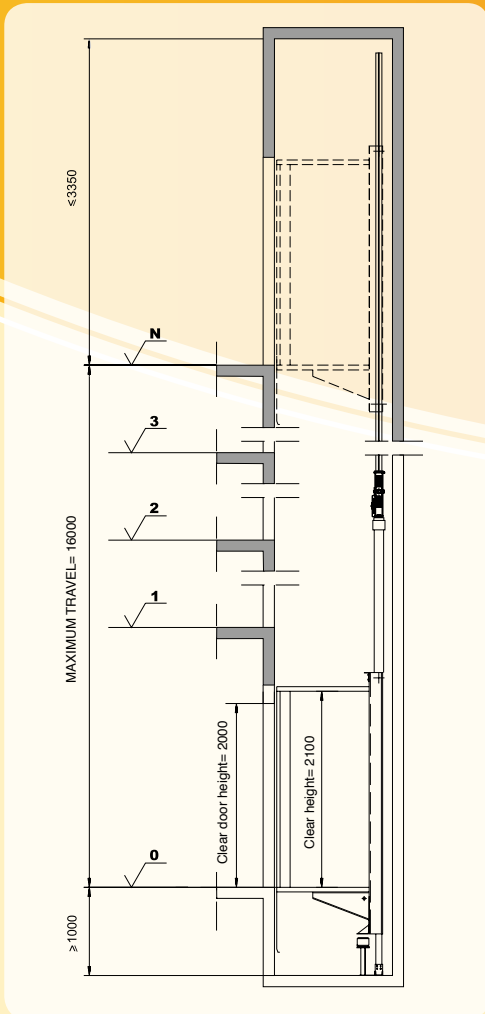


CONTROL POWER

Control by Programmable Logic Controller PLC.
Optional pre-wired looms.

MOTOR POWER			
0,2 m/s	0,3 m/s	0,4 m/s	0,5 m/s
2,2 KW	3,0 KW	4,4 KW	4,4 KW

Protective measures

- » Phase failure or reversal.
- » Thermistor motor protection.
- » Maximum running time.
- » Hoist overload device.
- » Two-way voice communication with "rescue" services.
- » Automatic recovery to the lower floor if power supply fails.
- » Re-leveling with open doors.
- » Hydraulic pipe rupture valve.
- » Safety gear activated by safety rope.
- » Indication in the control board when the lift-car is in unlocked zone.
- » Acoustic alarm.
- » Emergency light in the Car Operating Panel COP.

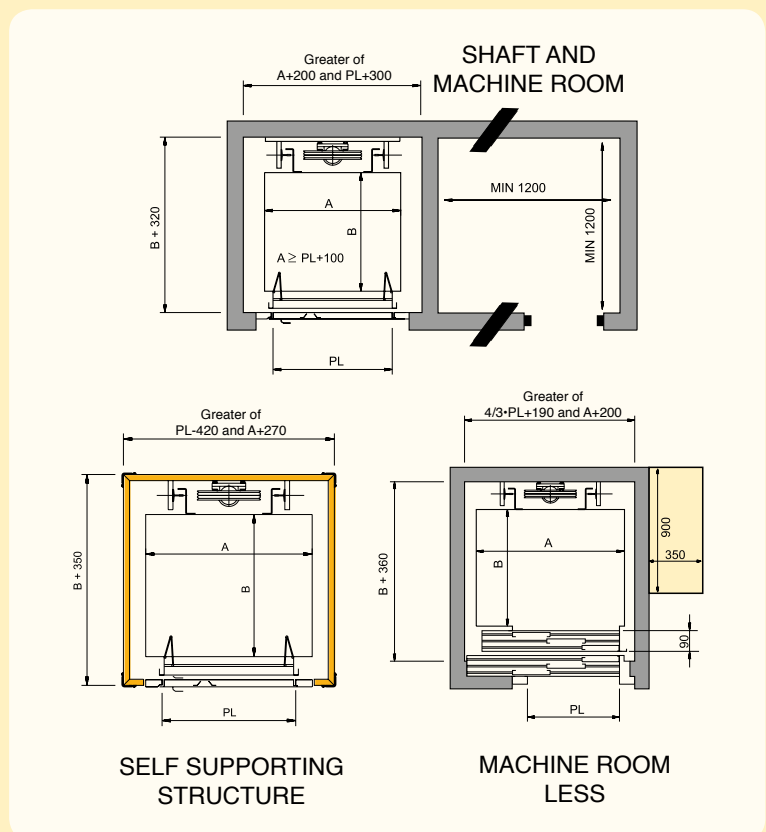


Standard lift-car

SPECIFICATION OF THE STÁNDAR

- » Floor to ceiling Car Operating Panel in the lift-car.
- » Ceiling in matt white fitted with halogen lights.
- » Swing hinged semi-automatic landing doors.
- » Automatic folding doors on lift-car ("Bus" doors).
- » Stainless steel skirting.
- » Black studded rubber floor.
- » Car side panels in skin-plate (see standard colours below)

Combining from the choice of different colours, floors and options, you get a large variety of esthetical arrangements to personalise your Lift-car.

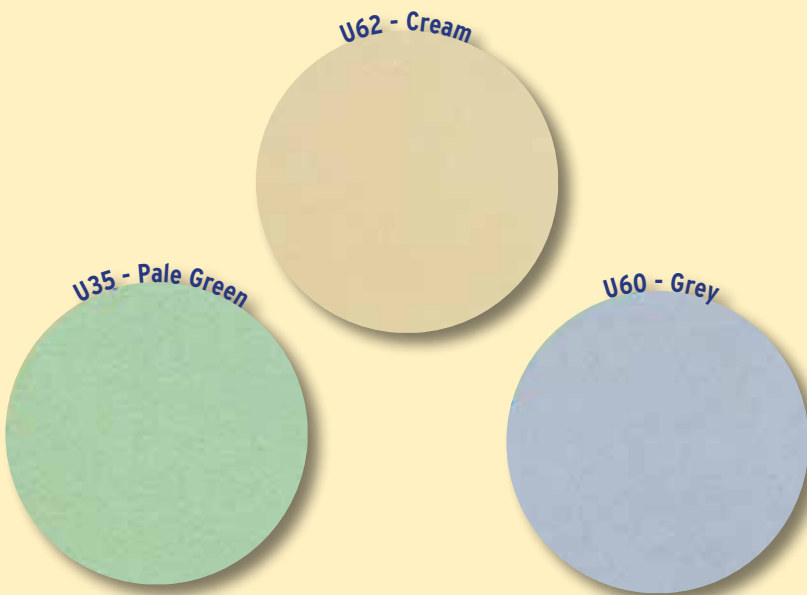

BLACK STUDED RUBBER FLOOR.

LIFT CAR DIMENSIONS

Types	A min.	B min.	A max.	B max.	PL
UHP	700	600	1000	900	600, 650 ó 700
UHM	900	700	1200	900	800

- » Comply with the requirements of the Directive 95/16/CEE and is designed in accordance with the harmonized standard EN 81-2.
- » Certified as model lift by a notified body.

Home Lift -UH- -UH-

Options

- » Indirect lighting.
- » 40 mm Ø handrails.
- » Automatic telescopic doors.
- » Large range of colours available.
Please ask for catalogue.

FLOORS



Grey studded rubber floor

Granite



Gloria Green



Ivory Black

Artificial Stone



Atlantic Blue



Naron Black

Zeus White (see picture)



ZEUS WHITE FLOOR

UH

This hydraulic, indirect acting 2:1 lift is especially suitable for small buildings, private homes and apartment blocks.

Has a capacity for 3 persons, or accompanied wheel chair, with a maximum load of 225kg and a travel up to 16m. The Lift car adapted for wheel chair has special dimensions, handrails and conveniently located push-buttons. This version has the travel limited to 9m.

Can be wall mounted or by means of a self-supporting structure. Allows multiple entrance configurations and a variety of door arrangements.

The flexible design can be easily accommodated in existing building conditions. Very simple to Install.



ENTRANCES

