

Installer information/Delivery data (important: please fill in)

Client, contact person and telephone

Delivery address

Client code

Branch code

Required delivery date

General characteristics

Model	<input type="checkbox"/> HO	<input type="checkbox"/> EH-500	<input type="checkbox"/> EH-1500	<input type="checkbox"/> EH/DC-1000	<input type="checkbox"/> EH/DC-3000 <input type="checkbox"/> EH/DCL-3000	<input type="checkbox"/> EH/DC-5000	<input type="checkbox"/> EH/4C
EH goods only	<input type="checkbox"/> Guiding non protruding from the upper level						
EHM goods and attendant			<input type="checkbox"/> EHM-1500		<input type="checkbox"/> EHM/DC <input type="checkbox"/> EHM/DCL	<input type="checkbox"/> EHM/DC	
Load (kg)	<input type="checkbox"/> 100 <input type="checkbox"/> 200 <input type="checkbox"/> 300 <input type="checkbox"/> 400 <input type="checkbox"/> 500	<input type="checkbox"/> 200 <input type="checkbox"/> 300 <input type="checkbox"/> 400 <input type="checkbox"/> 500 <input type="checkbox"/> 750	<input type="checkbox"/> 1000 <input type="checkbox"/> 1500 <input type="checkbox"/> 2000	<input type="checkbox"/> 1000 <input type="checkbox"/> 1500	<input type="checkbox"/> 2000 <input type="checkbox"/> 3000	<input type="checkbox"/> 4000 <input type="checkbox"/> 5000	<input type="checkbox"/> 4000 <input type="checkbox"/> 5000 <input type="checkbox"/> 6000 <input type="checkbox"/> 8000 <input type="checkbox"/> 10000

Nr stops

R, travel (mm)

Power supply

Speed (m/s)

EH

EHM

- 0,1
 0,2
 0,3 (only HO)

0,15

400V ±5% 3/N ~50 Hz

230V 1~ 50 Hz (only HO and EH-500)

Other (specify)

Characteristics of side protections and platform floor

EH (goods only)

EHM (goods and attendant)

Side protections

Finish

Height (mm)

- Tubular handrail
 Solid surface handrail
 Side walls ⁽¹⁾
 Bumpers ⁽²⁾
 Car ⁽¹⁾
 Bumpers ⁽²⁾
 Scissor foldable doors

- Painted
 Stainless steel

 Galvanized
 Stainless steel

1100

⁽¹⁾ Side protections and car not available for HO
⁽²⁾ Only EH-500; included with the rest of models

Side protections

Finish

Height (mm)

Car

- Galvanized
 Stainless steel

Floor

- Painted
 Stainless steel

Floor

- Painted
 Stainless steel
 Aluminium

Door characteristics

Supplied

- Swing manual
 1 leaf } Painted
 2 leaves } stainless steel
 Slat sliding door, 1 leaf
 Manual
 Automatic
Colour RAL
(standard gray RAL 7035)

Not supplied

Type
Lock

Per access

1

2


3

4

Clear opening (mm)

Clear height (mm)

Hand

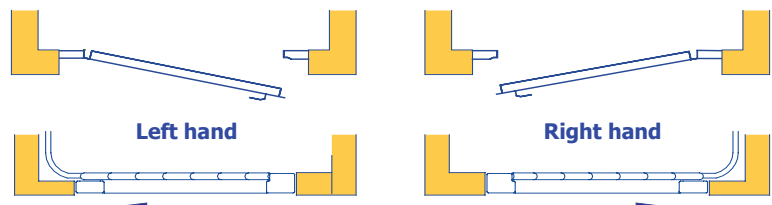

Miscellaneous

Options


- Chain suspension (included with HO, EH/DC-5000 , EH/4C and EHM models)
- Galvanized structure
- Flexible piping length (m)
- Low noise level power unit (only EH-1500, EH/DC-3000, EH/DCL-3000 and EHM models)
- Load control device (only HO, EH-500; included with the rest of models)
- Reduced speed re-leveling (included with EH/DC-5000 and EHM models)
- Anti-creep devices (not available for HO and EH-500; included with EH/4C)
- Y-Δ starting, main motor
- Y-Δ starting, auxiliary motor
- Waterproof electrical installation
- Shaft lighting
- Landing button panels flush-mounted on (optional only for EH models; included with EHM models)
 - wall door frame
- Button panels with key switches. Specify landings

Packing options

- Accessories and oil in wooden box
- Acc. standard for phytosanitary measures ISPM 15

Remarks

Dimensions

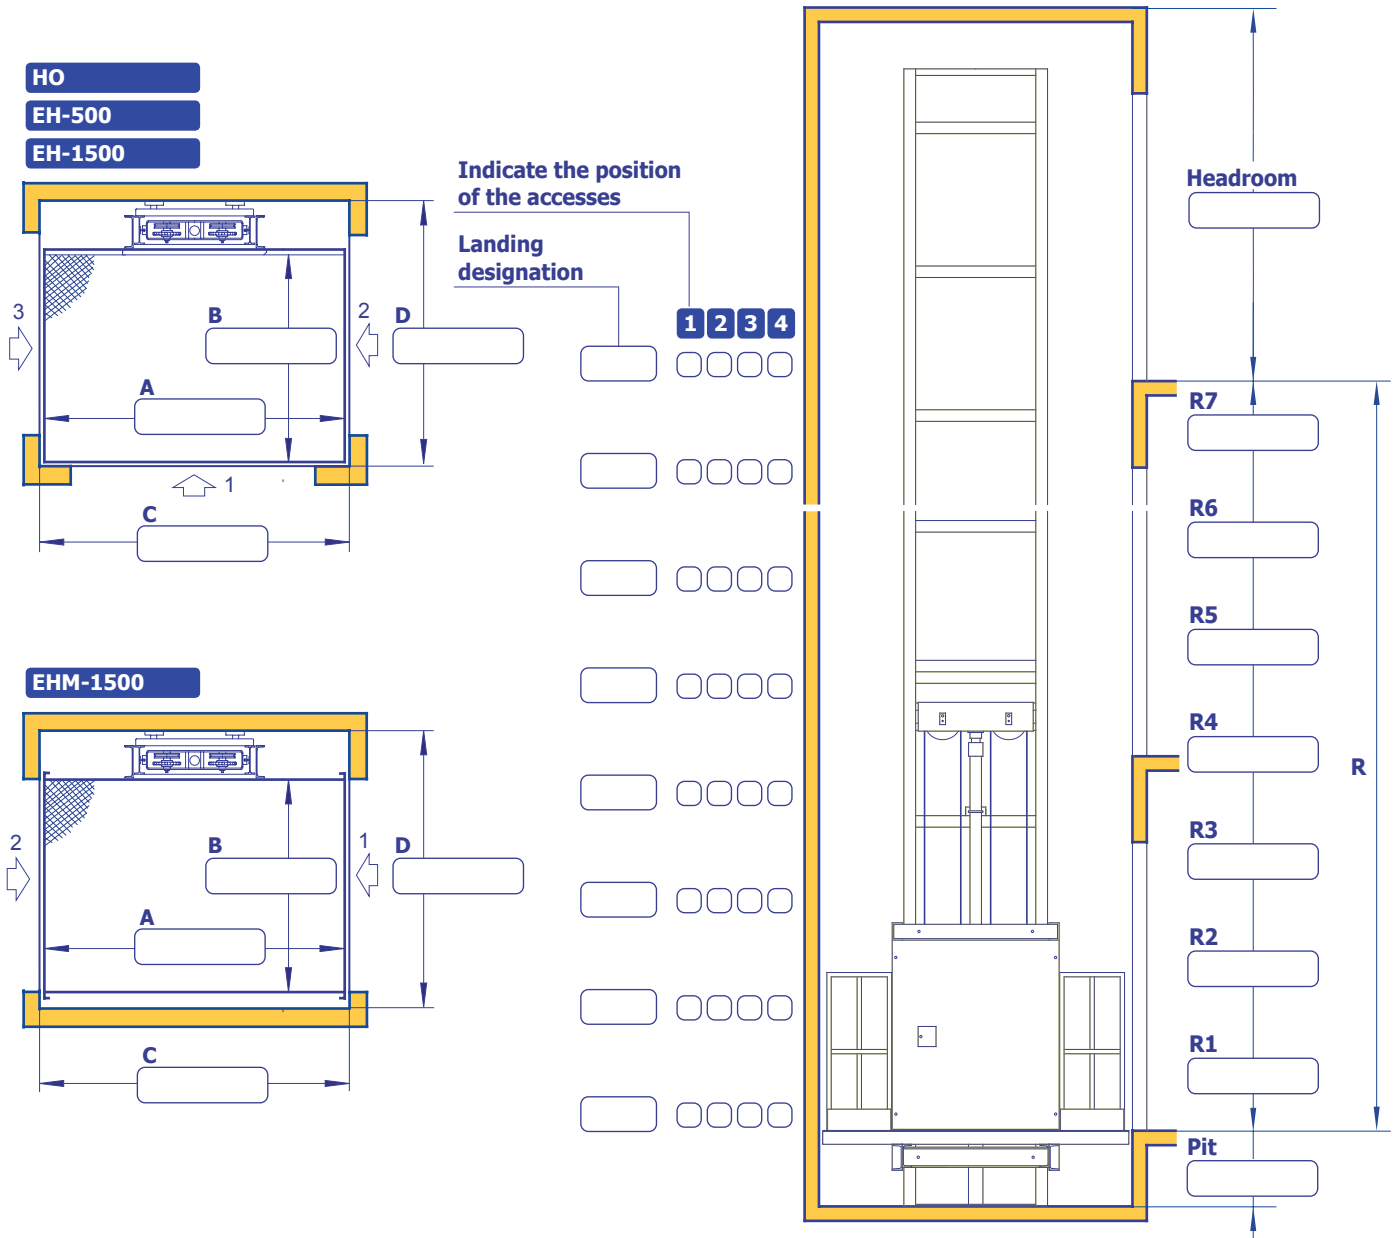

OFFER

ORDER


Dimensions

EH/DC-1000

EH/DC-3000


EH/DC-5000

EHM/DC

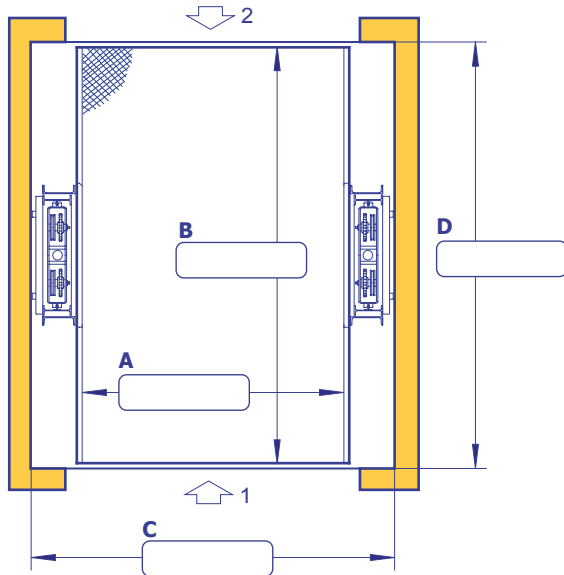


EH/4C


Type 1

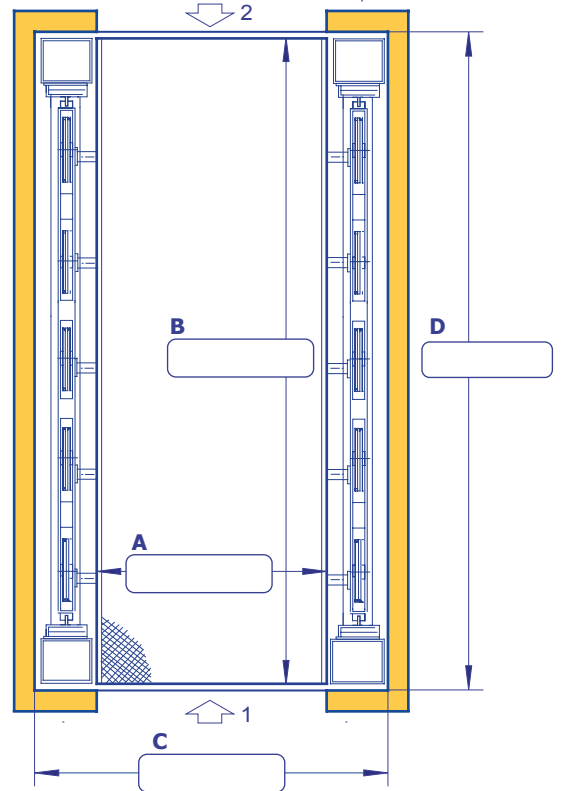

EH/DCL-3000

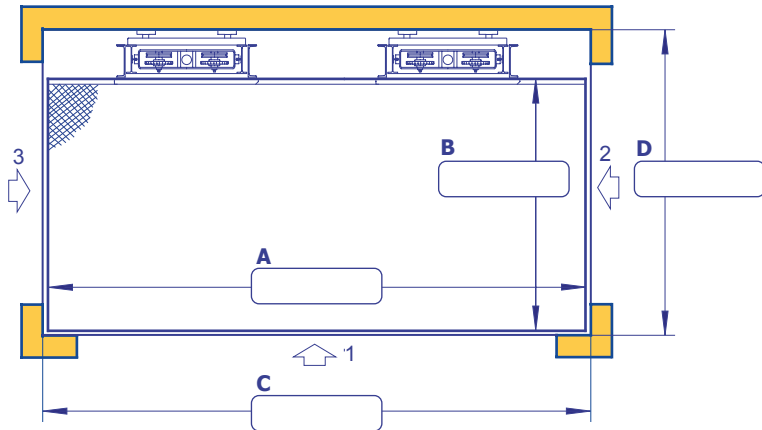

Type 2

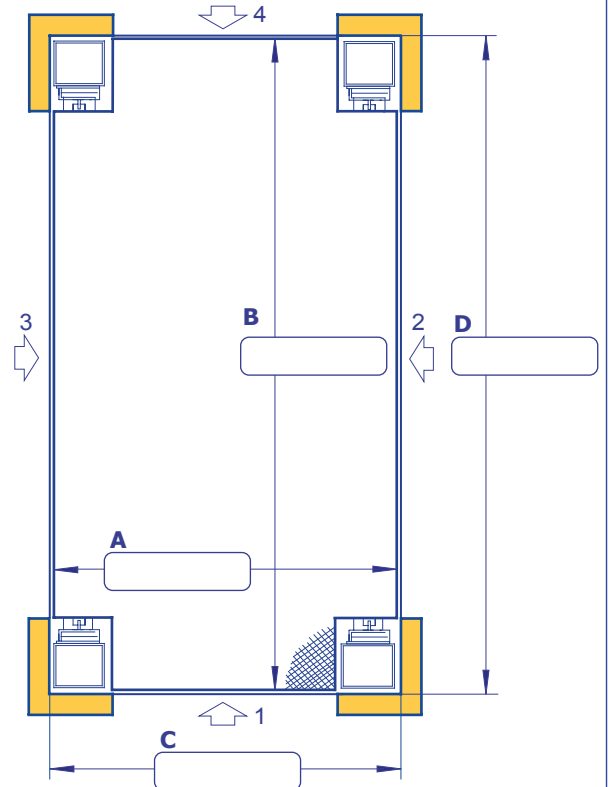

EHM/DCL

